





Series FDS



Typ FDS		300/80	300/100	300/120	300/150	500/80	500/100
Load	kg	300	300	300	300	500	500
Construction height	mm	70	70	70	85	70	70
Stroke	mm	800	1000	1200	1500	800	100
Useful stroke	mm	730	930	1130	1415	730	30
Length of platform	mm	1200	1400	1600	1900	1200	1400
Width of platform	mm	1100	1100	1100	1100	1100	1100
Own weight with unit	kg						
Lifting-, lowering time approx.	s	30	38	45	56	30	38
Motor	Voltage	400	400	400	400	400	400
Power	kW	1,1	1,1	1,1	1,1	1,1	1,1

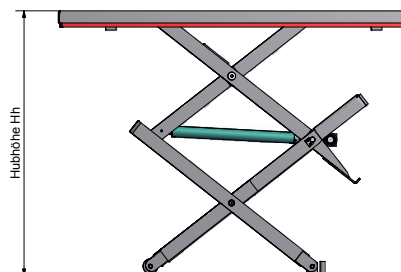

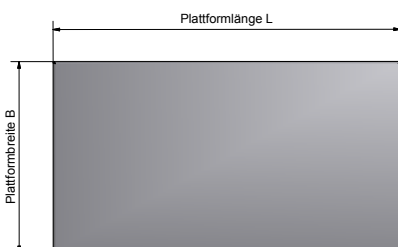

Series FDS

Typ FDS		500/120	500/150	750/100	750/120	750/150	1000/100
Load	kg	500	500	750	750	750	1000
Construction height	mm	85	110	85	85	110	110
Stroke	mm	1200	1500	1000	1200	1500	1000
Useful stroke	mm	1115	1390	915	1115	1390	890
Length of platform	mm	1600	2000	1400	1600	2000	1500
Width of platform	mm	1100	1100	1100	1100	1100	1100
Own weight with unit	kg						
Lifting-, lowering time approx.	s	45	56	38	45	56	40
Motor	Voltage	400	400	400	400	400	400
Power	kW	1,1	1,1	1,1	1,1	1,1	1,1

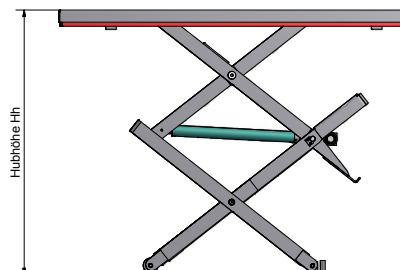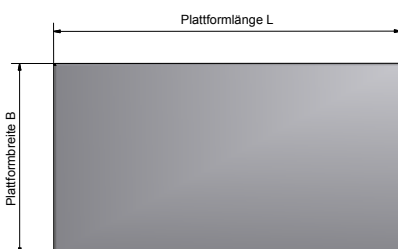



Series FDS

Typ FDS

1000/120 1000/150 1500/100 1500/120

		1000/120	1000/150	1500/100	1500/120
Load	kg	1000	1000	1500	1500
Construction height	mm	110	110	110	110
Stroke	mm	1200	1500	1000	1200
Useful stroke	mm	1090	1390	890	1090
Length of platform	mm	1700	2000	1500	1700
Width of platform	mm	1100	1100	1100	1100
Own weight with unit	kg				
Lifting-, lowering time approx.	s	48	60	40	48
Motor	Voltage	400	400	400	400
Power	kW	1,1	1,1	1,1	1,1

