



## Series F-CE

### Typ F-CE

300/75



300/85

300/95

500/75

500/85

Typ F-CE		300/75	300/85	300/95	500/75	500/85	
<b>Load</b>	kg	300	300	250	500	500	350
<b>Construction height</b>	mm	70	70	70	70	70	70
<b>Stroke</b>	mm	750	850	950	750	850	950
<b>Useful stroke</b>	mm	680	780	880	680	780	880
<b>Length of platform</b>	mm	1450	1600	1800	1450	1600	1800
<b>Width of platform</b>	mm	900	900	900	900	900	900
<b>Own weight</b>	kg	220	240	250	220	240	250
<b>Lifting-, lowering time approx.</b>	sec	20	25	30	20	25	30
<b>Motor</b>	Voltage	230/400	230/400	230/400	230/400	230/400	230/400
<b>Power</b>	kW	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55
<b>Wedge (accessory)</b>							

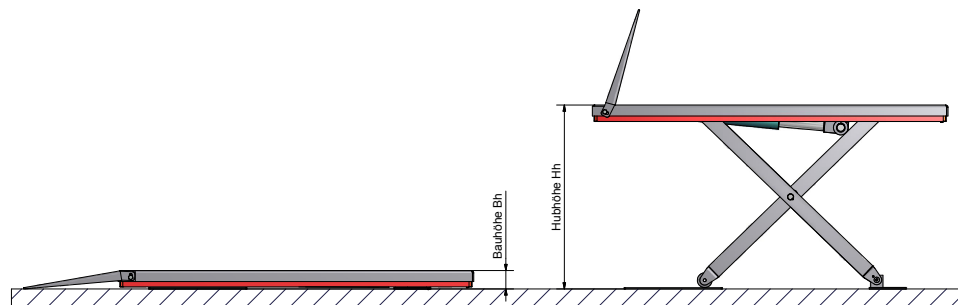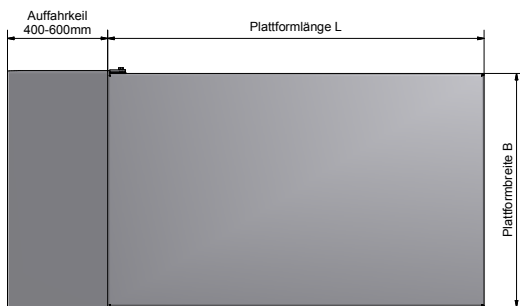



## Series F-CE

Typ F-CE		1000/75	1000/85	1000/95
<b>Load</b>	kg	1000	1000	850
<b>Construction height</b>	mm	80	80	80
<b>Stroke</b>	mm	750	850	950
<b>Useful stroke</b>	mm	670	770	870
<b>Length of platform</b>	mm	1450	1600	1800
<b>Width of platform</b>	mm	900	900	900
<b>Own weight</b>	kg	270	290	310
<b>Lifting-, lowering time approx.</b>	sec	25	30	35
<b>Motor</b>	Voltage	230/400	230/400	230/400
<b>Power</b>	kW	0,75/0,55	0,75/0,55	0,75/0,55
<b>Wedge (accessory)</b>				

