




### 产品系列 FE-M




Typ FE-M		300/75	600/75	900/75	1200/75	1500/75	2000/75
荷载	公斤	300	600	900	1200	1500	2000
设计高度	毫米	70	70	80	80	80/100	80/100
提升高度	毫米	750	750	750	750	750	750
有效作用高度	毫米	680	680	670	670	650	650
平台长度	毫米	1300	1300	1300	1300	1300	1300
平台宽度	毫米	910	910	910	910	910	910
自重	公斤	220	220	270	270	320	320
提升、下降时间 大约	秒	20	20	25	25	25	30
电机	伏	230/400	230/400	230/400	230/400	400	400
功率	千瓦	0,75/0,55	0,75/0,55	0,75/0,55	0,75/0,55	0,75	1,1





### 旋转平台

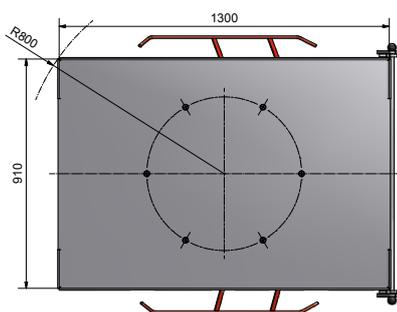

### 滚轮轨道配件

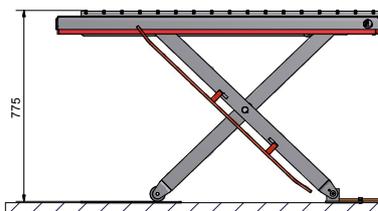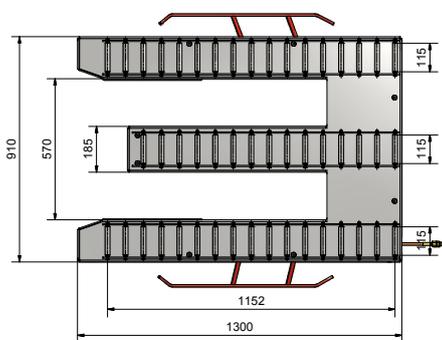

### 容器倾斜装置

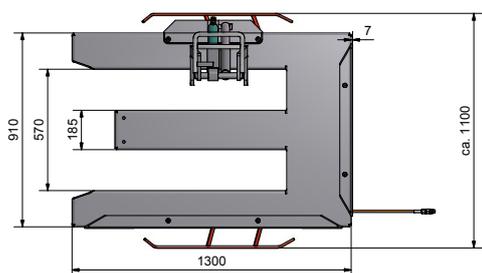

Bauhöhe Bh

